

DESCRIPTION

Envirograf® PGC is a rigid brown or white plastic glazing channel with intumescent fire protection available in heights of 10mm (30 minutes) and 15mm (60 minutes).


glass such as 6 mm wired, ceramic, or laminated glass; or without the intumescent on insulated glass.

USE

Designed for areas where noise and vibration are common. The rubber channel absorbs sound and accommodates small movements more efficiently than standard glazing fixtures, and it offers fire protection. Use with the intumescent for non-insulated

PERFORMANCE

This product has been included in tests in accordance with the general principles and criteria of BS476 Part 22 (1987), achieving 40 minutes and 66 minutes of fire protection (10mm high and 22mm high respectively).

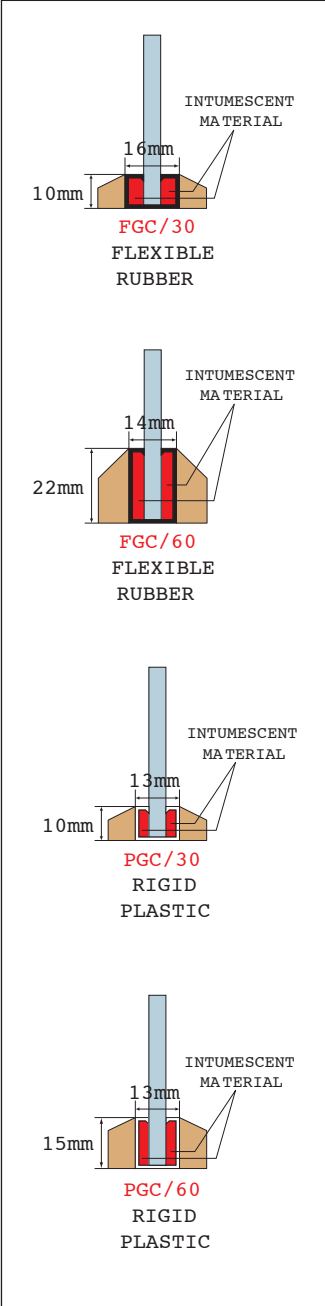

ORDERING REFERENCES:

PATENTED

FGC/30	10mm high flexible channel	30 minutes of fire protection
FGC/60	22mm high flexible channel	60 minutes of fire protection
PGC/30	10mm high rigid channel	30 minutes of fire protection
PGC/60	15mm high rigid channel	60 minutes of fire protection

PGC = rigid glazing channel to fit 5-7mm thick glass
Hardwood/software beading can be supplied to house the channel